

Grand Shine

FLOOR COAT



Grand Shine Floor Coat by Rubilux Paints offers unparalleled durability and shine for your flooring. It's an advanced formula of acrylic and hybrid emulsion. It provides long period protection and aesthetics to the concrete based floors.

PRODUCT BENEFITS:

LOW WEAR AND TEAR

It provides a durable and good abrasion resistance. Results to the low wear and tear of the film.

VIVID FINISH

It enhances aesthetics of the cement flooring and provides a high sheen finish to the concrete floors.

ADHESION AND PERFORMANCE

It provides an excellent adhesion to the cement substrate by good film strength under various environmental conditions.

OUR PACKS



1 ltr 4 ltr 20 ltr

COVERAGE

On regular masonry surface by brushing



1 COAT
35 - 45 sq.ft./ltr**

DRYING TIME



6 - 8
HOURS

PAINT APPLICATION METHOD

APPLICATION	STEP 1 GRAND SHINE FLOOR COAT BRUSH	STEP 2 GRAND SHINE FLOOR COAT BRUSH/ROLLER
DILUTION % (BY VOLUME)	10 - 20%	10 - 20%
THINNER	WATER	WATER
APPLICATION VISCOSITY (SEC)	BRUSH 30 - 40	BRUSH 30 - 40
RECOATING PERIOD (HOURS)	4 - 6 HRS	4 - 6 HRS

DEPENDING ON THE SURFACE,
A THIRD COAT OF PAINT MAY BE APPLIED AT
10 - 20% DILUTION FOR BETTER HIDING

SUBSTRATES: CEMENT BLOCK | CONCRETE FLOORS | CEMENT BASED TILES

Recoat period is quoted for 25°C and 50% Relative Humidity, these may vary under different conditions.

* Mineral Turpentine Oil

PRE PAINTING STEPS

SURFACE PREPARATION

Clean the floor thoroughly and remove any existing wax or sealant and fill any cracks or holes with crack filling paste. For new plastered concrete surface allow the surface to be cured for at least three to four weeks.

CLEAN THE FLOOR

Clean the floor thoroughly to remove any dirt, dust, or debris.

REPAIR IMPERFECTIONS

Fill any cracks, holes, or dents with filler and sand smooth.

PRIME THE FLOOR




Apply Grand Shine floor coat as a primer to the concrete floor to improve adhesion and provide a uniform surface.

TAPE EDGES

Tape off baseboards, molding, and any other areas that you don't want to paint.

ALLOW TIME TO DRY

Give the surface adequate time to dry before proceeding with the painting process.

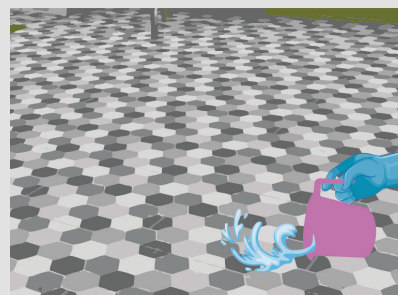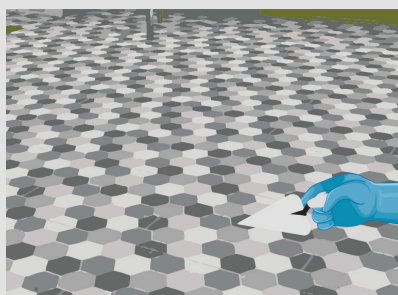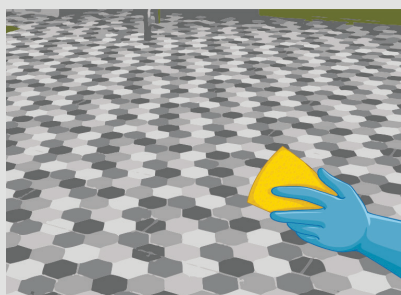

POST PAINTING CARE

AVOID FOOT TRAFFIC

Avoid walking on the floor for at least 24 hours after painting to allow the paint to fully dry.

AVOID MOISTURE

Avoid exposing the floor to moisture for at least 72 hours after painting to prevent the paint from peeling or chipping.

CLEAN REGULARLY

Regular cleaning will help keep the floor looking its best. Use a gentle cleaner and a soft mop.

AVOID ABRASIVE MATERIALS

Avoid using abrasive materials such as steel wool or scouring pads to clean the floor as they can scratch the surface.

APPLY A SEALER

Consider applying a clear floor sealer to protect the paint and enhance the durability of the finish.

SAFETY PRECAUTIONS

- ◆ Read and Follow the Instructions: Read the instructions carefully before using Grand Shine Floor Coat.
- ◆ Wear Protective Gear: Wear gloves and a respirator mask to protect yourself from fumes and chemicals.
- ◆ Ventilate the Area: Ensure the room is well ventilated during the painting process to avoid inhaling fumes.
- ◆ Avoid Skin Contact: Avoid skin contact with the paint and wash your hands thoroughly after handling it.
- ◆ Keep Out of Reach of Children: Keep Grand Shine Floor Coat and any related tools out of reach of children.
- ◆ Store Properly: Store Grand Shine Floor Coat properly in a cool, dry place to maintain its quality.
- ◆ Dispose of Properly: Dispose of unused paint and packaging materials in accordance with local regulations.
- ◆ In case of contact with eyes wash with water and if irritation persists you can seek medical attention.