

Rubilux

High Gloss Synthetic Enamel



Rubilux High Gloss Synthetic Enamel is an air-drying enamel made of synthetic resins and pigments that provides high weather resistance and light fastness. It is suitable for both indoor and outdoor surfaces and meets the performance requirements of IS. This enamel has excellent color resistance, water resistance, and durability. It is highly versatile and can be used for both decorative and industrial purposes. It comes in different hues suitable for any type of application and has a high covering capacity and ease of brushing, making it ideal for painting bus bodies, trucks, tractors, and earthmoving equipment.

PRODUCT BENEFITS

COLOR AND WATER RESISTANT

The enamel displays exceptional resistance to color and water, and is highly durable, making it ideal for various applications.


EXTREMELY VERSATILE

Rubilux High Gloss Synthetic Enamel is a versatile product that can be used for both decorative and industrial purposes. It can be applied to a variety of indoor and outdoor surfaces.

VAST RANGE OF COLORS

Rubilux High Gloss Synthetic Enamel is available in various hues and provides a glossy finish to all types of surfaces.

OUR PACKS

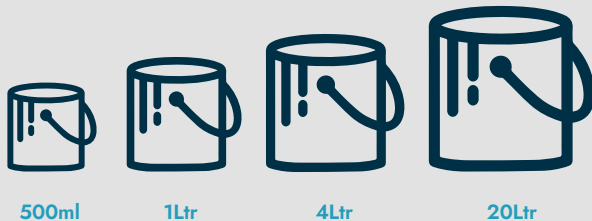

500ml

1Ltr

4Ltr

20Ltr

FINISH

MATT LOW SHEEN RICH SHEEN HIGH GLOSS

HIGH GLOSS

See sheen levels in technical details

PRE-PAINTING MEASURES

- ◆ The surface should be cleaned and prepared to remove any dirt, rust, grease, moisture, or loose particles.
- ◆ For metal surfaces, use Rubilux Metal Primer, and for wood surfaces, use Rubilux Wood Primer for optimal results.
- ◆ The primer surface should be sanded before applying the finishing coat.
- ◆ To achieve a good coating film thickness, it is recommended to apply two coats of 50 microns or 2 mils.

PROCEDURE OF APPLICATION

- ◆ The enamel can be applied using a brush or spray after dilution with Rubilux Enamel Thinner.
- ◆ It is recommended to apply 2 coats with overnight drying between each coat.