

# Rubilux

## Powder Putty



Rubilux Powder Putty is a product based on white cement, with the inclusion of re-dispersible polymer and functional additives. It is used for applying on both interior and exterior rough plasters to provide a neat and tidy appearance.

### PRODUCT BENEFITS

#### SMOOTH AND EVEN TEXTURE

It gives an even and consistent texture to rough plasters to give a clean finish.

#### CONVENIENCE

It is easy to handle, making it a convenient choice for usage.

#### WATER-PROOF

It is designed to resist damage caused by water and can hence be used in places where water is present.

#### STRONG ADHESION

It has a strong adhesion and resistance to pulling, crushing, and bending forces.

#### IMPROVED DURABILITY

It has a longer lifespan and is highly durable against wear and tear and binds well to the final coat applied on top of it.

### OUR PACKS



### COVERAGE

On rough surface by putty knife




**2 COATS**

1 -1.5 sq.m/kg\*\*

for upto 1.5 mm thickness in 2 coats

### SUGGESTED USAGE

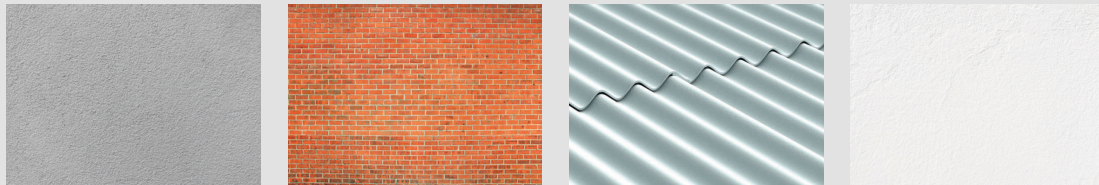

It can be used on all types of exterior cement plasters/interior walls, asbestos sheets, concrete etc

### PAINT APPLICATION METHOD

APPLICATION	STEP 1 SANDING	STEP 2 PRE WET THE SURFACE	STEP 3 FIRST COAT Rubilux Paints Powder Putty KNIFE / TROWEL	STEP 4 SECOND COAT Rubilux Paints Powder Putty KNIFE / TROWEL	STEP 5 PRIMER AND EMULSION COAT
THINNER	SAND THE SURFACE WITH EMERY PAPER 180 AND WIPE CLEAN	PRE WET THE SURFACE BEFORE APPLICATION OF 1ST COAT OF ASIAN WALL PUTTY	WATER	WATER	APPLY A COAT OF PRIMER FOLLOWED BY 2 - 3 COATS OF EMULSION
DILUTION % (BY VOLUME)			40% - 50%	40% - 50%	
APPLICATION VISCOSITY			N/A	N/A	
RECOATING PERIOD			6 - 8 HRS	6 - 8 HRS	

## PRE-PAINTING MEASURES

### PLASTERING

When it comes to newly constructed masonry surfaces, it's crucial to exercise patience and allow them to cure completely before moving forward. To ensure that the new masonry surface has adequate time to cure, it is recommended to wait for 28 days before undertaking any further action. This will help to ensure that the masonry surface is stable and ready for subsequent treatment.

### TIDYING

Before painting, the surface should be thoroughly cleaned and free of any loose paint, dust, or grease. If there is any growth of fungus, algae, or moss, it should be eliminated using a wire brush and water. For areas with excessive dampness, it's recommended to use Rubilux Grand DampProof to prevent further dampness.

### SEALING FOR CRACKS

To seal cracks that are up to 3 mm wide, it is recommended to use Rubilux Crack Fill Paste.

### PATCHING AND LEVELING

If there are any dents or holes on the surface, it's recommended to use Rubilux Acrylic Wall Putty or a mixture of white cement and fine sand in the ratio of 1:3 to fill them up.

### PRE-WETTING

Before applying the first coat of putty, it is advisable to wet the surface with water. The same applies to the second coat of putty as well - pre-wetting the surface is recommended.



## AFTER-PAINTING MAINTENANCE

Before applying emulsion, it is necessary to put a layer of Exterior Wall Primer or Rubilux Grand Wall Sealer on the Rubilux Powder Putty.

## SAFETY MEASURES TO ADOPT

- ◆ To ensure safety when handling this container, keep it in an upright position in a cool and dry place with the lid tightly closed.
- ◆ Keep it away from children and do not store it near food.
- ◆ Swallowing this product can be harmful, and immediate medical attention is necessary if ingested.
- ◆ When using, wear protective eyewear and in case of contact with eyes, rinse thoroughly and seek medical advice.
- ◆ In case of skin contact, wash immediately with soap and water, and seek medical attention if irritation persists.
- ◆ Avoid breathing in vapors or spray and use a nose pad during sanding to prevent dust inhalation.
- ◆ Do not dispose of leftover paint in water sources, and use sand or earth to contain spills.
- ◆ This product does not contain lead, mercury, or chromium compounds.