

ZEALCOAT MAX

Interior Plastic Emulsion



Rubilux Zeal Coat Max gives a smooth, glossy texture to the wall and provides a soft and sheen finish compared to other emulsions.

PRODUCT BENEFITS

SHEEN AND COVERAGE

Rubilux Zeal Coat Max provides soft and sheen finish and best coverage and hiding to the walls makes a surface richer than expected. is a great alternative to distemper as it provides the same finish as plastic paint, but at a comparable cost. It offers better coverage than distemper, so you will need less material, and its durability lasts for a minimum of 3 to 4 years, meaning you won't have to paint as frequently.

WASHABILITY

Rubilux Zeal Coat Max is a premium economical finish that provides better washability and longevity than normal distemper. The film lasts for more than three years.

MULTIPLE COLORS

Rubilux Zeal Coat Max provides a wide range of dark and light shades.

OUR PACKS




FINISH



See sheen levels in technical details

COVERAGE

On regular masonry surface by brushing

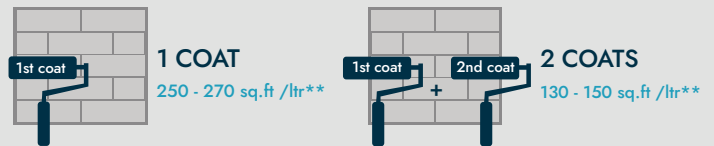

PAINT APPLICATION METHOD

APPLICATION	STEP 1 SANDING	STEP 2 RUBILUX CEMENT PRIMER / RUBILUX MULTIPURPOSE WALL SEALER BRUSH/ROLLER/ SPRAY	STEP 3 ACRYLIC WALL PUTTY PUTTY KNIFE	STEP 4 SANDING	STEP 5 RUBILUX CEMENT PRIMER / RUBILUX MULTIPURPOSE WALL SEALER BRUSH/ROLLER/ SPRAY	STEP 6 SANDING	STEP 7 ZEAL COAT MAX EMULSION BRUSH/ROLLER/ SPRAY	STEP 8 ZEAL COAT MAX EMULSION BRUSH/ROLLER/ SPRAY
THINNER	SAND THE SURFACE WITH SAND PAPER 180 AND WIPE CLEAN	WATER	WATER	SAND THE SURFACE WITH SAND PAPER 180 AND WIPE CLEAN	WATER	SAND THE SURFACE WITH SAND PAPER 180 AND WIPE CLEAN	WATER	WATER
DILUTION %		BRUSH / ROLLER SPRAY 60 % - 80%	BASED ON REQUIREMENT		BRUSH / ROLLER SPRAY 60% - 80%		BRUSH / ROLLER 35 - 40 SPRAY	BRUSH / ROLLER 35 - 40 SPRAY
APPLICATION VISCOSITY		BRUSH / ROLLER 30 - 40 SPRAY 20 - 25 BRUSH / ROLLER 30 - 40 SPRAY 20 - 25	N/A		BRUSH / ROLLER 30 - 40 SPRAY 20 - 25 BRUSH / ROLLER 30 - 40 SPRAY 20 - 25		BRUSH / ROLLER 30 - 35 SPRAY 22 - 25	BRUSH / ROLLER 30 - 35 SPRAY 22 - 25
RECOATING PERIOD		6 - 8 HRS 4 - 6 HRS	4 - 6 HRS		6 - 8 HRS 4 - 6 HRS		4 HRS	4 HRS

PRE-PAINTING MEASURES

PLASTERING

When it comes to newly constructed masonry surfaces, it's crucial to exercise patience and allow them to cure completely before moving forward. To ensure that the new masonry surface has adequate time to cure, it is recommended to wait for 28 days before undertaking any further action. This will help to ensure that the masonry surface is stable and ready for subsequent treatment.

TIDYING

Before painting, the surface should be thoroughly cleaned and free of any loose paint, dust, or grease. If there is any growth of fungus, algae, or moss, it should be eliminated using a wire brush and water. For areas with excessive dampness, it's recommended to use Rubilux Grand DampProof to prevent further dampness.

SEALING FOR CRACKS

To seal cracks that are up to 3 mm wide, it is recommended to use Rubilux Crack Fill Paste.

PATCHING AND LEVELING

If there are any dents or holes on the surface, it's recommended to use Rubilux Acrylic Wall Putty or a mixture of white cement and fine sand in the ratio of 1:3 to fill them up.



AFTER-PAINTING MAINTENANCE

To remove stains from the painted surface, use a mild soap solution and a sponge to clean the area. After cleaning, wipe the surface with a clean cloth. Make sure to let the painted surface dry for a week before attempting to clean it.

CAUTIONARY STEPS

- ◆ Do not apply when ambient temperature is less than 10°C or if the temperature might drop to this level within 4 hours of application.
- ◆ Do not over-thin or over-extend the brush.
- ◆ Stir well and strain before use.
- ◆ Only use Rubilux Paints machine colorants for tinting.
- ◆ After adding the tinter, shake the tinted paint thoroughly both immediately and before use.

SAFETY MEASURES TO ADOPT

- ◆ To ensure safety when handling this container, keep it in an upright position in a cool and dry place with the lid tightly closed.
- ◆ Keep it away from children and do not store it near food.
- ◆ Swallowing this product can be harmful, and immediate medical attention is necessary if ingested.
- ◆ When using, wear protective eyewear and in case of contact with eyes, rinse thoroughly and seek medical advice.
- ◆ In case of skin contact, wash immediately with soap and water, and seek medical attention if irritation persists.
- ◆ Avoid breathing in vapors or spray and use a nose pad during sanding to prevent dust inhalation.
- ◆ Do not dispose of leftover paint in water sources, and use sand or earth to contain spills.
- ◆ This product does not contain lead, mercury, or chromium compounds.