

Rubilux

Premium White Primer

Rubilux Premium White Primer is formulated with a synthetic resin base and provides moderate protection against corrosion. It can be applied using either a brush or spray and offers satisfactory coverage, opacity, and flow properties.

PRODUCT BENEFITS

SMOOTH AND MATT FINISH

It provides a sleek and non-glossy appearance to the surfaces, resulting in an elegant and sophisticated look.

EXCEPTIONAL ANTI-SETTLING PROPERTIES AND ADHESION


It has effective anti-settling properties and demonstrates strong adhesion, while also providing good coverage, flow, leveling, and opacity.

ANTI-CORROSIVE PROPERTIES

Because it is made with synthetic resin, it provides moderate protection against corrosion and other damage.


PRODUCT FEATURES:

OUR PACKS

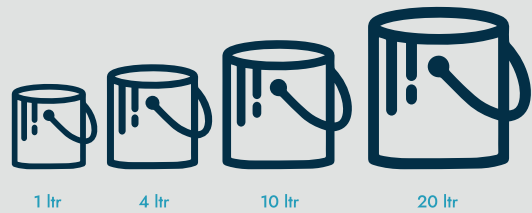

COVERAGE

On smooth flat mild steel surface by brushing



1 COAT
160 - 180
sq.ft/ltr**

SUGGESTED USAGE



PAINT APPLICATION METHOD

APPLICATION	STEP 1 SANDING	STEP 2 RUBILUX PREMIUM WHITE PRIMER KNIFE / TROWEL	STEP 3 SANDING BRUSH / ROLLER	STEP 4 TRUCARE KNIFING PASTE FILLER OPTIONAL	STEP 5 RUBILUX PREMIUM WHITE PRIMER BRUSH / ROLLER	STEP 6 SANDING
THINNER	SAND THE SURFACE WITH EMERY PAPER 180 AND WIPE CLEAN	🔥 MTO*	SAND LIGHTLY WITH EMERY PAPER 180 AND WIPE CLEAN	SMOOTHEN THE SURFACE BY FILLING DENTS WITH THIN COATS OF TRUCARE KNIFING PASTE FILLER. ALLOW IT TO DRY FOR 4 - 6 HOURS. SAND LIGHTLY WITH EMERY PAPER 180 AND WIPE CLEAN.	🔥 MTO*	SAND LIGHTLY WITH EMERY PAPER 320 BEFORE APPLICATION OF TOPCOATS.
DILUTION % (BY VOLUME)		0 - 5			0 - 5	
APPLICATION VISCOSITY		40 - 45 SEC			40 - 45 SEC	
RECOATING PERIOD		6 - 8 HRS			6 - 8 HRS	

PROCEDURE OF APPLICATION

- Sanding for Surface preparation
- First coat of Rubilux Premium White Primer by brushing or spraying method.
- Sanding
- Second coat of Rubilux Premium White Primer by brushing method.
- Sanding

CAUTIONARY MEASURES

- ◆ It is highly flammable and should not be applied if the ambient temperature is below 10 °C or is expected to drop to this level within 4 hours of application.
- ◆ It should only be used in well-ventilated areas, and appropriate protective clothing, such as gloves and overalls, should be worn.
- ◆ Store the product in a ventilated location away from sources of fire and ignition.
- ◆ Avoid contact with skin and eyes, and wash with clean water if it occurs.
- ◆ Do not inhale or inject the paint.
- ◆ Seek medical attention if symptoms persist.
- ◆ To avoid settling, mix the material thoroughly before use.

SAFETY MEASURES TO ADOPT

- ◆ Store the container in a cool, dry place with the lid tightly closed and upright.
- ◆ Keep away from children and food.
- ◆ Seek medical attention immediately if swallowed, and wear eye protection during application.
- ◆ Rinse eyes with plenty of water if in contact with paint, and seek medical advice.
- ◆ Wash skin immediately with soap and water if in contact with paint, and seek medical attention if irritation develops.
- ◆ Wear suitable nose pad during sanding to avoid dust inhalation.
- ◆ Do not pour leftover paint down the drain or in water courses.
- ◆ Use sand or earth to contain spills.
- ◆ No added Lead, Mercury or Chromium compounds.
- ◆ Dispose off in land filling and not in drain or any water channel.